


# IEC Busbar Mounting Systems

Bulletin 141A

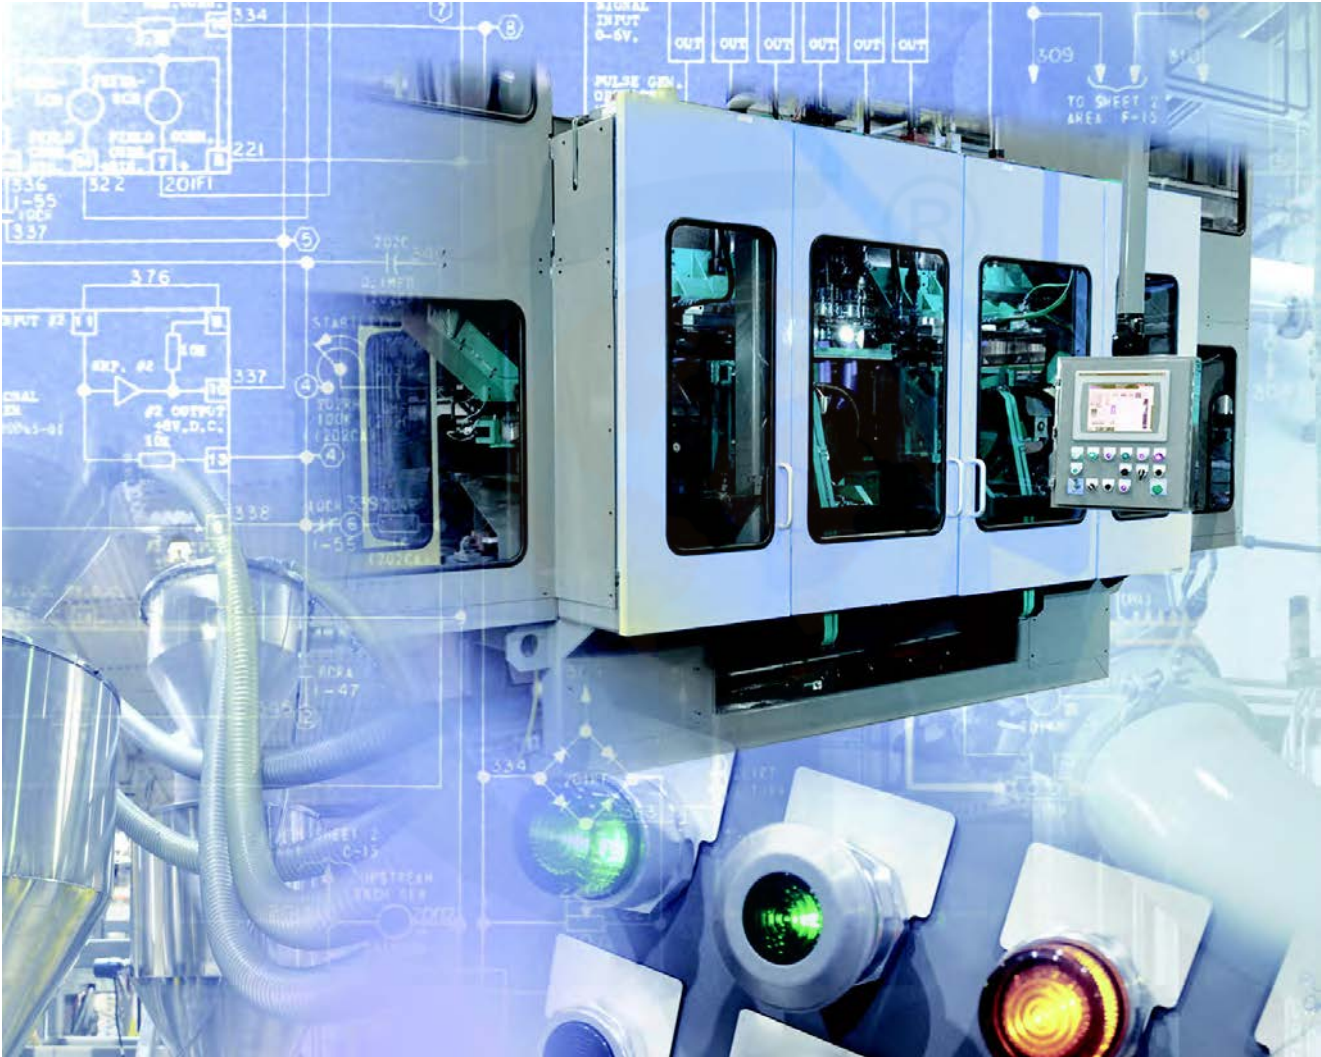

LISTEN.  
THINK.  
SOLVE.®

# What's Inside

| Topic   | Page |
|---|------|
| Product Selection   | 3    |
| Catalog Number Explanation  | 3    |
| Busbar Adapters   | 3    |
| Iso (Isolation) Busbar Adapters   | 4    |
| Busbar Adapters for Bulletin 140G Molded Case Circuit Breakers, 140MG Motor Protection Circuit Breakers, and 140MG Motor Circuit Protectors | 4    |
| Panel Mounting Modules  | 4    |
| Iso Busbar Adapters   | 5    |
| 141A Mounting System, Classic   | 5    |
| Standard Busbar Adapters  | 6    |
| Standard Busbar Adapters with Terminals   | 7    |
| Busbar Adapters for Circuit Breakers  | 7    |
| Accessories for Standard and Iso Busbar Adapters  | 8    |
| UL Fuse Bases and Fuse Holders  | 9    |
| Fused and Non-fused IEC Switch Disconnectors  | 10   |
| Accessories for Fused Devices   | 11   |
| Busbars   | 12   |
| Busbar Supports   | 13   |
| Supply Modules, 3 Poles   | 14   |
| Single Terminals for Connecting to Busbars  | 14   |
| Terminal Covers   | 15   |
| Busbar Covers and Shrouds   | 16   |
| Busbar Accessories  | 16   |
| 141A-C Compact System   | 17   |
| 141A-C Compact System—Busbar Rack Components  | 17   |
| Panel Mounting Modules  | 18   |
| Specifications  | 19   |
| Current Carrying Capacity of Copper Busbars   | 19   |
| Adapter Data  | 20   |
| Wiring  | 20   |
| Supply Modules  | 20   |
| Short-Circuit Current Ratings per UL (support spacing at 800 mm)  | 22   |
| General Data  | 23   |
| Approximate Dimensions  | 25   |
| Busbar Adapters   | 25   |
| UL Fuse Bases and Fuse Holders  | 32   |
| Fused and Non-fused IEC Switch Disconnectors  | 34   |
| Busbar Rack Components  | 38   |
| Terminals and Terminal Covers   | 42   |
| Busbar Covers and Shrouds   | 44   |
| 141A-C Compact System   | 46   |

## Catalog Number Explanation

Examples given in this section are not intended to be used for product selection. Not all combinations will produce a valid catalog number.

### Busbar Adapters

141A - C S 45 R R 16  
                   a      b      c      d      e      f

| a    |  |
|------|--|
| Type |  |
| Code | Description                            |
| G    | Standard busbar adapter                |
| F    | Standard busbar adapter with terminals |
| C    | Compact busbar adapter                 |

| b      |                  |
|--------|------------------|
| Length |                  |
| Code   | Description      |
| C      | Compact (160 mm) |
| S      | Short (200 mm)   |
| M      | Medium (260 mm)  |
| L      | Long (320 mm)    |

| c     |             |
|-------|-------------|
| Width |             |
| Code  | Description |
| 45    | 45 mm       |
| 54    | 54 mm       |
| 63    | 63 mm       |
| 72    | 72 mm       |
| 81    | 81 mm       |
| 90    | 90 mm       |
| 108   | 108 mm      |
| 110   | 110 mm      |
| 180   | 180 mm      |
| 270   | 270 mm      |

| d            |                                    |
|--------------|------------------------------------|
| Top Hat Rail |                                    |
| Code         | Description                        |
| R            | Plastic hat rail                   |
| S            | Plastic hat rail                   |
| M            | Metal hat rail                     |
| V            | Screw mounting, variable positions |

| e               |   |
|-----------------|---|
| Bottom Hat Rail |   |
| Code            | Description                             |
| R               | Rockwell Automation custom plastic rail |
| S               | Standard plastic rail                   |
| Blank           | No bottom rail                          |

| f              |                                |
|----------------|--------------------------------|
| Current Rating |                                |
| Code           | Description                    |
| Blank          | 0 A (no electrical connection) |
| 16             | 16 A                           |
| 25             | 32 A                           |
| 45             | 63 A                           |
| 125            | 125 A                          |
| 200            | 200 A                          |
| 250            | 250 A                          |