


IEC Busbar Mounting Systems

Bulletin 141A

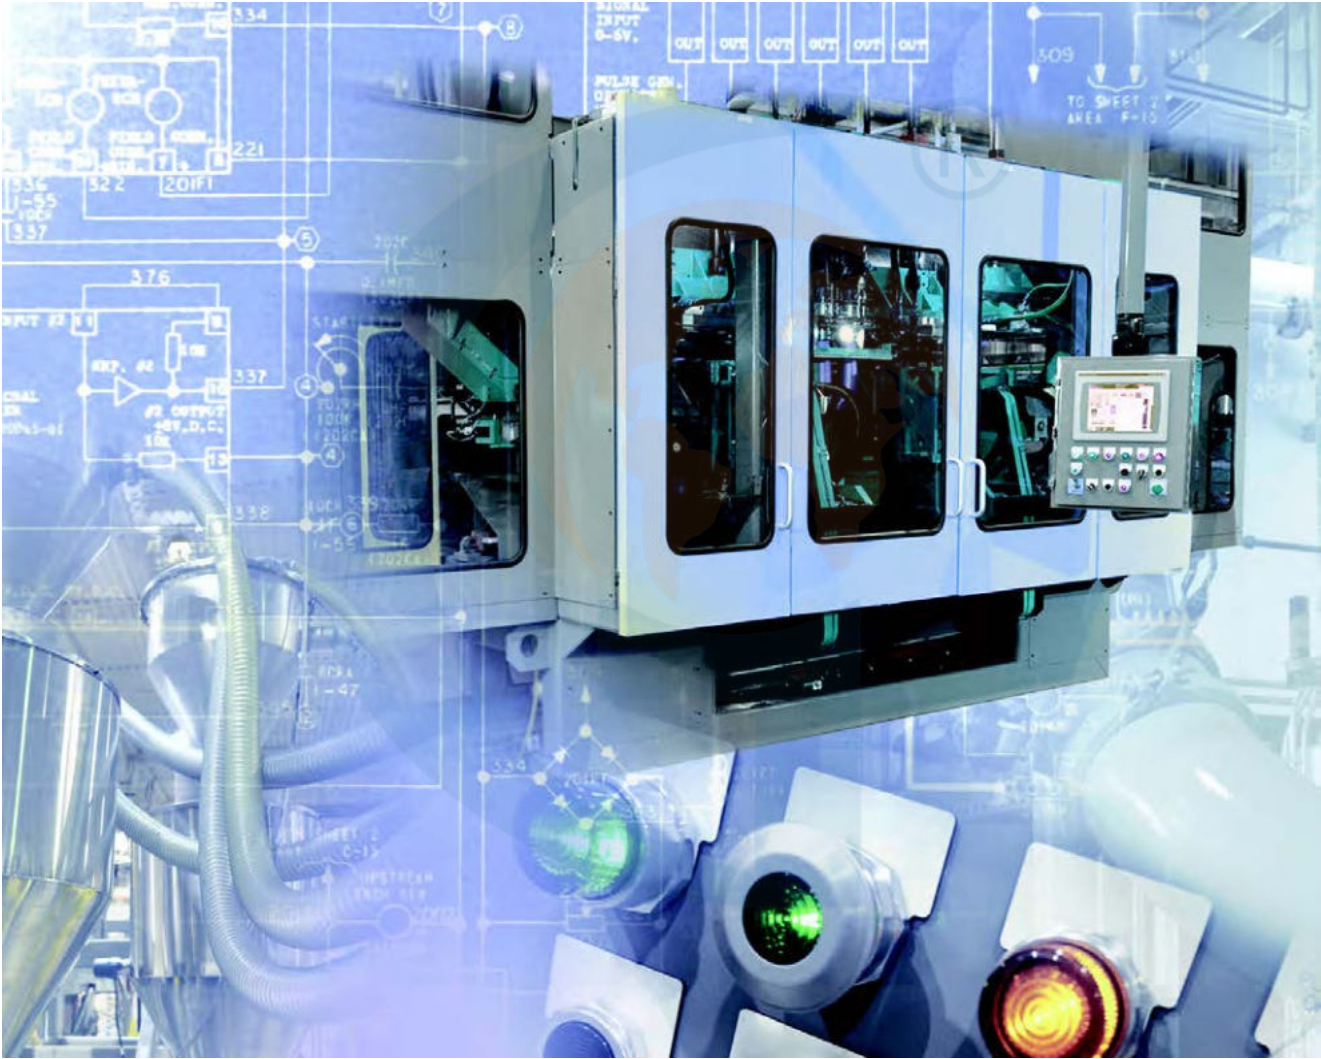

LISTEN.
THINK.
SOLVE.®

What's Inside

| Topic | Page |
|---|------|
| Product Selection | 3 |
| Catalog Number Explanation | 3 |
| Busbar Adapters | 3 |
| Iso (Isolation) Busbar Adapters | 4 |
| Busbar Adapters for Bulletin 140G Molded Case Circuit Breakers, 140MG Motor Protection Circuit Breakers, and 140MG Motor Circuit Protectors | 4 |
| Panel Mounting Modules | 4 |
| Iso Busbar Adapters | 5 |
| 141A Mounting System, Classic | 5 |
| Standard Busbar Adapters | 6 |
| Standard Busbar Adapters with Terminals | 7 |
| Busbar Adapters for Circuit Breakers | 7 |
| Accessories for Standard and Iso Busbar Adapters | 8 |
| UL Fuse Bases and Fuse Holders | 9 |
| Fused and Non-fused IEC Switch Disconnectors | 10 |
| Accessories for Fused Devices | 11 |
| Busbars | 12 |
| Busbar Supports | 13 |
| Supply Modules, 3 Poles | 14 |
| Single Terminals for Connecting to Busbars | 14 |
| Terminal Covers | 15 |
| Busbar Covers and Shrouds | 16 |
| Busbar Accessories | 16 |
| 141A-C Compact System | 17 |
| 141A-C Compact System—Busbar Rack Components | 17 |
| Panel Mounting Modules | 18 |
| Specifications | 19 |
| Current Carrying Capacity of Copper Busbars | 19 |
| Adapter Data | 20 |
| Wiring | 20 |
| Supply Modules | 20 |
| Short-Circuit Current Ratings per UL (support spacing at 800 mm) | 22 |
| General Data | 23 |
| Approximate Dimensions | 25 |
| Busbar Adapters | 25 |
| UL Fuse Bases and Fuse Holders | 32 |
| Fused and Non-fused IEC Switch Disconnectors | 34 |
| Busbar Rack Components | 38 |
| Terminals and Terminal Covers | 42 |
| Busbar Covers and Shrouds | 44 |
| 141A-C Compact System | 46 |

Catalog Number Explanation

Examples given in this section are not intended to be used for product selection. Not all combinations will produce a valid catalog number.

Busbar Adapters

141A - C S 45 R R 16
 a b c d e f

| a | |
|------|--|
| Type | |
| Code | Description |
| G | Standard busbar adapter |
| F | Standard busbar adapter with terminals |
| C | Compact busbar adapter |

| b | |
|--------|------------------|
| Length | |
| Code | Description |
| C | Compact (160 mm) |
| S | Short (200 mm) |
| M | Medium (260 mm) |
| L | Long (320 mm) |

| c | |
|-------|-------------|
| Width | |
| Code | Description |
| 45 | 45 mm |
| 54 | 54 mm |
| 63 | 63 mm |
| 72 | 72 mm |
| 81 | 81 mm |
| 90 | 90 mm |
| 108 | 108 mm |
| 110 | 110 mm |
| 180 | 180 mm |
| 270 | 270 mm |

| d | |
|--------------|------------------------------------|
| Top Hat Rail | |
| Code | Description |
| R | Plastic hat rail |
| S | Plastic hat rail |
| M | Metal hat rail |
| V | Screw mounting, variable positions |

| e | |
|-----------------|---|
| Bottom Hat Rail | |
| Code | Description |
| R | Rockwell Automation custom plastic rail |
| S | Standard plastic rail |
| Blank | No bottom rail |

| f | |
|----------------|--------------------------------|
| Current Rating | |
| Code | Description |
| Blank | 0 A (no electrical connection) |
| 16 | 16 A |
| 25 | 32 A |
| 45 | 63 A |
| 125 | 125 A |
| 200 | 200 A |
| 250 | 250 A |