Product data sheet Characteristics

SSLM1D101M7

SSR - DIN rail mount - input 90-280 V AC, output 4-28 V DC, 0.1A, positive logic





Mairi		
Range of product	Harmony Relay	
Product or component type	Solid state relay	
Device short name	SSLM	
Network number of phases	1 phase	

Complementary			
Mounting support	Symmetrical DIN rail		
[In] rated current	0.1 A		
Output voltage	428 V DC		
[Uc] control circuit voltage	90280 V AC		
Contacts type and configuration	1 NO		
CLAMPING FORCE	0.60.8 N.m		
Connections - terminals	Screw terminals, clamping capacity: 1 x 0.21 x 5.26 mm² (AWG 24AWG 10)		
Switching voltage	90 V AC turn-on		
Load current	0.1 A		
Maximum voltage drop	<0.5 V on-state		
Response time	20 ms (turn-on) 20 ms (turn-off)		
Overvoltage category	III		
Width	7.5 mm		
Height	80 mm		
Depth	63 mm		
Net weight	0.03 kg		

Environment

Dielectric strength	4000 V for input/output	
Pollution degree	2	ata Tis
Product certifications	UL EAC CSA	Pris. document
Marking	CE	:

UL CSA EAC

Ambient air temperature for operation 0...70 °C

Packing Units

•	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	37 g
Package 1 Height	7.5 cm
Package 1 width	11 cm
Package 1 Length	11.1 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	12
Package 2 Weight	444 g
Package 2 Height	7.5 cm
Package 2 width	11 cm
Package 2 Length	11.1 cm
Unit Type of Package 3	S01
Number of Units in Package 3	48
Package 3 Weight	2.001 kg
Package 3 Height	15 cm
Package 3 width	15 cm
Package 3 Length	40 cm


Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
Mercury free	Yes	
RoHS exemption information	Yes	
China RoHS Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Circularity Profile	End of Life Information	

Product data sheet Dimensions Drawings

SSLM1D101M7


Dimensions

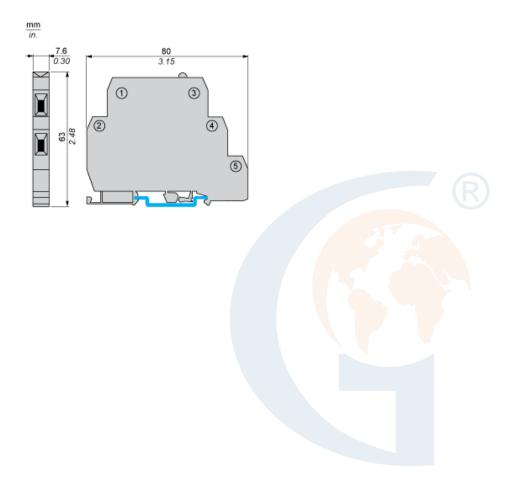

Product data sheet Connections and Schema

SSLM1D101M7

Wiring Diagram



1,2: Field VAC
3: Vcc
4: Logic
5: Ground
(A) LED

