

DeviceNet Media System

Bulletin Numbers 1485A, 1485C, 1485F, 1485G, 1485K, 1485P, 1485R, 1485T

Topic	Page
DeviceNet Flat Media System	2
DeviceNet Round Media	20
DeviceNet Auxiliary Power Round Media	35










Specifications

Certifications	UL and cUL Listed
Cable Type	4 conductor unshielded
Contact Material	Tinned annealed copper
Cable Rating	CL2 2c/AWG 19 and 2c/AWG 21 90°C, CL2 and CM Certified
Home Run Connection	26 mm (1.02 in.)
Operating Temperature [C (F)]	-10+90 ° (14194 °)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

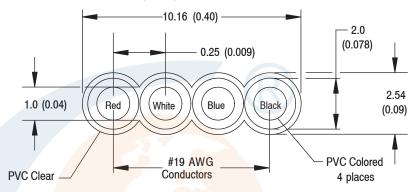





Specifications

Safety Ratings		
Certifications	UL Recognized	
Physical Characteristics		
Connector Style	Housing:glass-fiber reinenforced PBT cover: PA66	
Contact Material	Phosphor bronze/nickel substrate	
Electrical		
Current Capacity	4 A	
Voltage	30V DC	
Environmental		
Enclosure Type Rating	IP20	
Vibration	1.52 mm (0.06 in.) displacement, 10500 Hz	
Operating Temperature [C (F)]	-35+55 ° (-31+131 °)	
Storage Temperature [C (F)]	-35+80 ° (-31+176 °)	

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

