


# DeviceNet Media System

Bulletin Numbers 1485A, 1485C, 1485F, 1485G, 1485K, 1485P, 1485R, 1485T

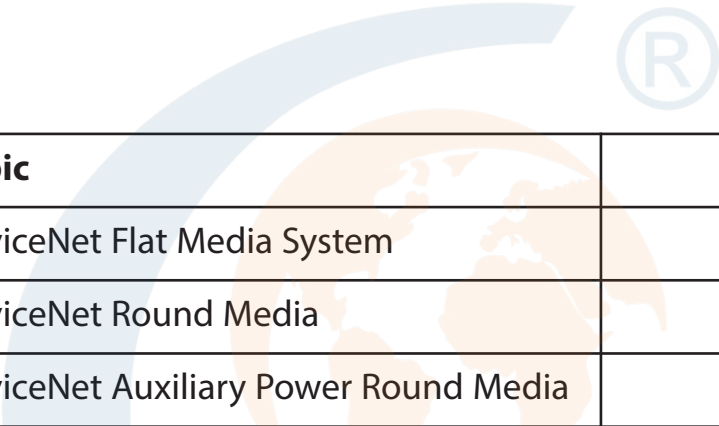

Topic	Page
DeviceNet Flat Media System	2
DeviceNet Round Media	20
DeviceNet Auxiliary Power Round Media	35

# KwikLink™ Lite Flat Media Cable Spools




## Specifications


Certifications	UL and cUL Listed
Cable Type	4 conductor unshielded
Contact Material	Tinned annealed copper
Cable Rating	CL2 2c/AWG 19 and 2c/AWG 21 90°C, CL2 and CM Certified
Home Run Connection	26 mm (1.02 in.)
Operating Temperature [C (F)]	-10...+90 ° (14...194 °)

## Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

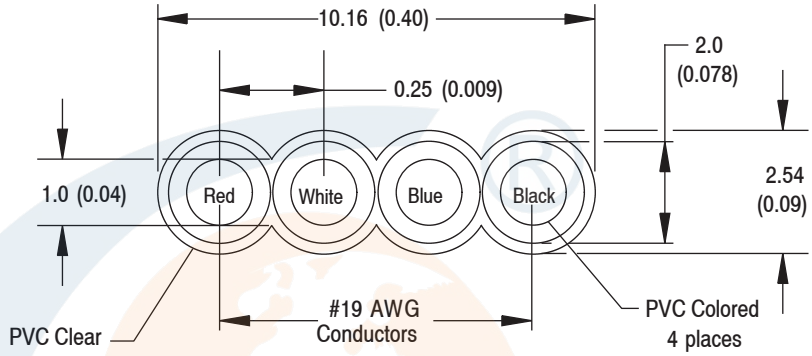

Trunk Line Connector, Drop-Line Connector, and Flat to Thin Round Converter IDC

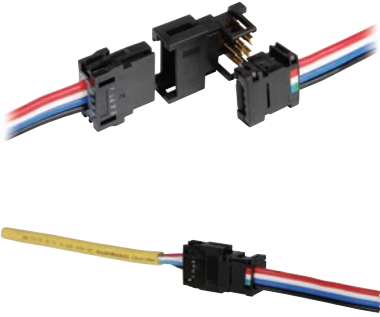

Specifications

Safety Ratings	
Certifications	UL Recognized
Physical Characteristics	
Connector Style	Housing:glass-fiber reinenforced PBT cover: PA66
Contact Material	Phosphor bronze/nickel substrate
Electrical	
Current Capacity	4 A
Voltage	30V DC
Environmental	
Enclosure Type Rating	IP20
Vibration	1.52 mm (0.06 in.) displacement, 10...500 Hz
Operating Temperature [C (F)]	-35...+55 ° (-31...+131 °)
Storage Temperature [C (F)]	-35...+80 ° (-31...+176 °)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

