

LISTEN.  
THINK.  
SOLVE.®

# PowerFlex® 40P



## TECHNICAL DATA

ADJUSTABLE FREQUENCY AC DRIVES

### Product Description

As part of the industry leading PowerFlex® family of AC drives, the PowerFlex 40P addresses your needs for closed loop control and category 3 Safe-off in a compact and cost effective design. The PowerFlex 40P AC drive is based on the popular PowerFlex® 40 AC drive platform and shares common options and accessories. Available in power ratings from 0.4 to 11 kW (0.5 to 15 HP) and in voltage classes of 240, 480 and 600 volts, PowerFlex 40P AC drives are designed to meet global OEM and end-user demands for flexibility, space savings and ease of use. PowerFlex 40P AC drives are cost-effective solutions for speed control of applications such as diverters, smart conveyors, packaging machines, palletizers, drafting machines, ring spinning machines and synthetic fiber spinning machines.



### Table of Contents

<u>Description</u> .....	<u>Page</u>
PowerFlex 40P AC Drive Features .....	3
PowerFlex 40P AC Drive Advanced Features .....	8
Application-Specific Features .....	10
Catalog Number Explanation .....	12
PowerFlex 40P Standard Drives .....	13
User Installed Options .....	14
Installation Considerations .....	18
Specifications .....	22

## PowerFlex 40P AC Drive Features


### Flexible Packaging and Mounting Options

- Versatile packaging options allow for **panel mount NEMA 1/IP30** as well as **NEMA 4/IP66** (with like enclosure) using the plate/flange drives.
- **Plate drives** also allow for a reduction in overall enclosure size based on a 75% reduction in enclosed Watts.
- Installation can be a virtual snap using the **DIN rail mounting** feature on B frame drives. Panel mounting is also available, providing added flexibility.
- An optional **IP30 (NEMA 1) conduit box** is easily adapted to the standard IP20 (NEMA Type Open) product, providing increased environmental ratings.
- **Zero Stacking™** is allowable for ambient temperatures up to 40°C, saving valuable panel space. 50°C ambient temperatures are permitted with minimal spacing between drives.
- **External filters** are available for all PowerFlex 40P drive ratings to meet EN55011, Class A and B EMC requirements.



### Start Up, Programming and Operation

- PowerFlex 40P drive programming is achieved by the use of an **external HIM** or via the resident DSI connection and the **PC programming tool**.
  - DriveTools™ SP
  - DriveExplorer™
  - Pocket DriveExplorer™
- **StepLogic™ wizards** available for DriveTools SP and DriveExplorer (Lite or Full) assist in setup of position or velocity StepLogic programming
- An **integral display and reset button** allows user to change display parameters and reset the drive if a fault occurs.
- **4 digit display** with 10 additional LED indicators provides an intuitive display of drive status and information.
- Integral **RS485 communications** can be used for programming from a PC. It can also be used in a multi-drop network configuration. A serial converter module provides connectivity to any controller with a DF1 port.
- The 10 most common application parameters are contained in the **Basic Program Group**. Common parameters shared with PowerFlex 40 are in the **Advanced Program Group**, and additional position control and fibers parameters located in **Enhanced Program Group**.
- A **NEMA Type 4X remote** and **NEMA Type 1 hand-held LCD keypad** provide additional programming and control flexibility, both featuring the popular CopyCat function.

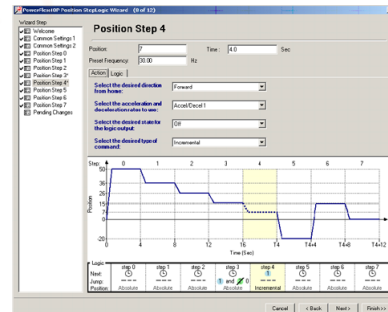

*StepLogic wizards available for ease of position or velocity StepLogic programming using drive software tools.*

