


03040

MOUNTING PLATE NSX/CVS/VIGI/INS 250 V. FIX.TOGGLE

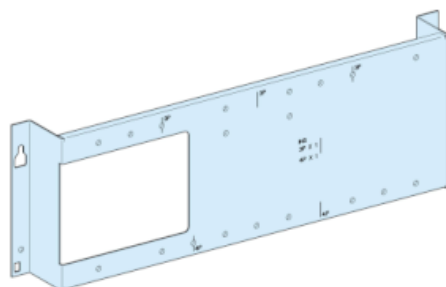

Main

Range	Prisma
Range compatibility	Prisma G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	<p>Easypact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>Easypact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation</p> <p>Compact: fixed INS250 - control: direct front rotary handle - vertical installation</p> <p>Compact: fixed INV100 - control: direct front rotary handle - vertical installation</p> <p>Compact: fixed INV160 - control: direct front rotary handle - vertical installation</p> <p>Compact: fixed INV200 - control: direct front rotary handle - vertical installation</p> <p>Compact: fixed INV250 - control: direct front rotary handle - vertical installation</p> <p>Compact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>Compact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation</p> <p>Easypact: fixed CVS100...160 with earth leakage protection - control: toggle - vertical installation</p> <p>Easypact: fixed CVS250 with earth leakage protection - control: toggle - vertical installation</p> <p>Compact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation</p> <p>Compact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation</p>
Poles description	<p>1 x 3P: fixed INS250 vertical installation</p> <p>1 x 4P: fixed INS250 vertical installation</p> <p>1 x 3P: fixed INV250 vertical installation</p> <p>1 x 4P: fixed INV250 vertical installation</p> <p>4 x 3P: fixed CVS100...160 vertical installation</p> <p>3 x 4P: fixed CVS100...160 vertical installation</p> <p>4 x 3P: fixed CVS250 vertical installation</p> <p>3 x 4P: fixed CVS250 vertical installation</p> <p>1 x 3P: fixed INV100 vertical installation</p> <p>1 x 4P: fixed INV100 vertical installation</p> <p>1 x 3P: fixed INV160 vertical installation</p> <p>1 x 4P: fixed INV160 vertical installation</p> <p>1 x 3P: fixed INV200 vertical installation</p> <p>1 x 4P: fixed INV200 vertical installation</p> <p>4 x 3P: fixed NSX100...160 vertical installation</p> <p>3 x 4P: fixed NSX100...160 vertical installation</p> <p>4 x 3P: fixed NSX250 vertical installation</p> <p>3 x 4P: fixed NSX250 vertical installation</p>

Complementary

Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Number of vertical modules [50 mm]	<p>8 module(s): INS250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INS250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV100, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV100, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV160, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV160, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV200, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV200, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p>
Condition of using cable tie	Need additional plate (1M high) when installation of device is in vertical
Height	150 mm
Net weight	0.915 kg
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)

Environment

Standards	IEC 61439-2
Product certifications	ASEFA

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	915 g
Package 1 Height	5.3 cm
Package 1 width	15 cm
Package 1 Length	47 cm
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Weight	10.6 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------