


03414

MOUNTING PLATE VIGI NSX/CVS PLUGIN TOGGLE/ROT/MOT - 4P 250A HORIZONTAL WIDTH 650

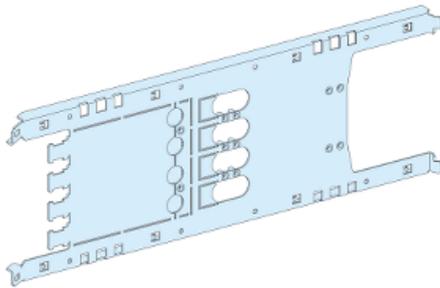

Main

Range	Prisma
Range compatibility	Prisma P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Installed device	<p>Easypact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Easypact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Easypact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Easypact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>Compact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation</p> <p>Compact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>Compact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation</p> <p>Compact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>Compact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>Compact: plug-in NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p>

Compact: plug-in NSX100...160 with earth leakage protection - control: toggle - horizontal installation
 Compact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation
 Compact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation
 Compact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation
 Compact: plug-in NSX250 with earth leakage protection - control: toggle - horizontal installation
 Compact: fixed NSX250 with earth leakage protection - control: motor mechanism - horizontal installation
 Compact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation
 Compact: plug-in NSX250 with earth leakage protection - control: motor mechanism - horizontal installation

Poles description	1 x 4P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 4P: plug-in NSX100...160 horizontal installation 1 x 4P: plug-in NSX250 horizontal installation
-------------------	--

Complementary

Installation description	Cubicle - width 650 mm depth 400 mm
Number of vertical modules [50 mm]	4 module(s): CVS100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 with earth leakage protection , direct in 650 mm Widecubicle
Height	200 mm
Net weight	2.36 kg
Surface finish	Smooth Matt
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)

Environment

Standards	IEC 61439-2
Product certifications	ASEFA

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.5 kg
Package 1 Height	3 cm
Package 1 width	20.1 cm
Package 1 Length	57.2 cm
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Weight	20.85 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm
Unit Type of Package 3	P12
Number of Units in Package 3	64
Package 3 Weight	158 kg
Package 3 Height	75 cm
Package 3 width	80 cm

Package 3 Length	120 cm
------------------	--------

Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

