



Main

Range of product	Phaseo Universal
Product or component type	Safety and isolation transformer
Rated power in VA	100 VA
Input voltage	230 V AC single phase, terminal(s): N-L1 400 V AC phase to phase, terminal(s): L1-L2
Output voltage	115/230 V AC
Secondary winding	Double
Protective cover	With
Ambient air temperature for operation	-20...60 °C

Complementary

Input voltage limits	360...440 V 207...253 V
Network frequency limits	47...63 Hz
Input voltage tolerance	+/- 15 V
Efficiency	86 %
Power dissipation in W	16.3 W
Voltage variation at nominal load	4 % at 230 V 0,0417 at 400 V
Output sustained overvoltage	0,049 (no load, hot state)
Maximum voltage drop at rated load	4.23 %
No load losses	11.26 W
Short-circuit voltage	0,062
Output protection type	Against overload, protection technology: external Against overvoltage, protection technology: external Against short-circuits, protection technology: external
Connections - terminals	For input connection: screw type terminals, connection capacity: 5 x 4 mm ² AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 4 mm ² AWG 11

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

For output connection: screw type terminals, connection capacity: 4 x 4 mm² AWG 11

Marking	CE
Fixing mode	By 4 screws diameter: 5.5 mm on vertical panel, operating position: horizontal By 4 screws diameter: 5.5 mm on vertical panel, operating position: vertical By clips on 35 x 15 mm symmetrical DIN rail By 4 screws diameter: 5.5 mm on horizontal panel with derating to 90 %
Output coupling	Grounding of secondary Parallel Series by internal jumper
Operating altitude	3000 m
Electrical insulation class	Class B
Status LED	1 LED (orange)input voltage:
Width	87 mm
Height	139 mm
Depth	108 mm
Net weight	2.86 kg

Environment

Product certifications	UR EAC
Standards	UL 506
IP degree of protection	IP20
Environmental characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Ambient air temperature for storage	-40...80 °C
Relative humidity	0...95 % during operation
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	3200 V between input and ground 3200 V between output and ground 5100 V between input and output

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3.182 kg
Package 1 Height	11.6 cm
Package 1 width	18.5 cm
Package 1 Length	25.5 cm
Unit Type of Package 2	P06
Number of Units in Package 2	30
Package 2 Weight	108.46 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	60 cm

Offer Sustainability


Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------



Dimensions

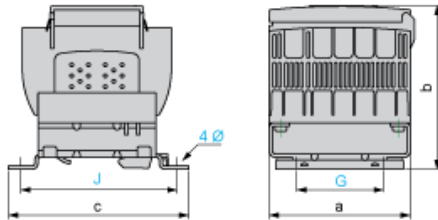


Dimensions in mm

a	b	c	G	J	Ø
87	139	108	60	96	5.5


Dimensions in in.

a	b	c	G	J	Ø
3.42	5.47	4.25	2.36	3.78	0.22


Internal Scheme



Primary Voltage Wiring

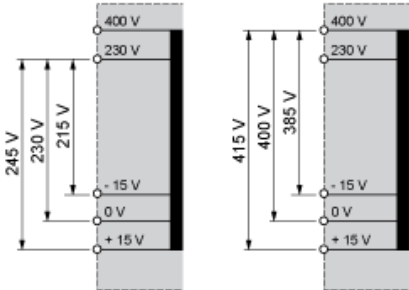

Secondary Voltage Wiring

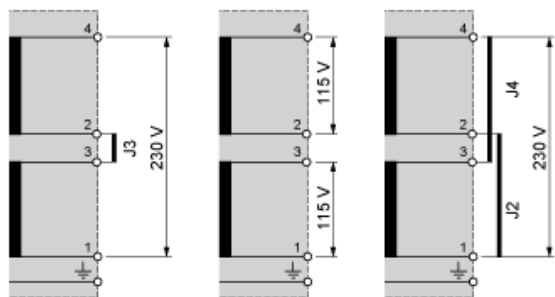

J2, J3, J4 Internal Jumper

