



Main

Range	TeSys
Range of Product	TeSys F
Product or Component Type	Contacteur
Device short name	LC1F
Contacteur application	Resistive load Motor control
Utilisation category	AC-4 AC-1 AC-3
Poles description	3P
[Ue] rated operational voltage	<= 1000 V AC 50/60 Hz <= 460 V DC
[Ie] rated operational current	1600 A 104 °F (40 °C) <= 440 V AC AC-1 780 A 131 °F (55 °C) <= 440 V AC AC-3
[Uc] control circuit voltage	110 V AC 40...400 Hz

Complementary

[Uimp] rated impulse withstand voltage	8 kV
Overvoltage category	III
[Ith] conventional free air thermal current	1600 A 104 °F (40 °C)
Rated breaking capacity	6240 A IEC 60947-4-1
[Icw] rated short-time withstand current	3000 A 104 °F (40 °C) - 3 min 6250 A 104 °F (40 °C) - 10 s 5600 A 104 °F (40 °C) - 30 s 4600 A 104 °F (40 °C) - 1 min 2200 A 104 °F (40 °C) - 10 min
Associated fuse rating	1600 A gG <= 440 V 800 A aM <= 440 V
Average impedance	0.1 mOhm - Ith 1600 A 50 Hz
[Ui] rated insulation voltage	1000 V IEC 60947-4-1 1500 V VDE 0110 group C
Compatibility code	LC1F
Power pole contact composition	3 NO
Motor power kW	450 kW 1000 V AC 50/60 Hz AC-3) 400 kW 380...400 V AC 50/60 Hz AC-3) 425 kW 415 V AC 50/60 Hz AC-3) 425 kW 440 V AC 50/60 Hz AC-3) 450 kW 500 V AC 50/60 Hz AC-3) 475 kW 660...690 V AC 50/60 Hz AC-3) 220 kW 220...230 V AC 50/60 Hz AC-3) 110 kW 400 V AC 50/60 Hz AC-4)
Control circuit voltage limits	Operational 0.85...1.1 Uc 40...400 Hz 131 °F (55 °C) Drop-out 0.2...0.4 Uc 40...400 Hz 131 °F (55 °C)
Operating time	40...80 ms closing 130...230 ms opening
Maximum operating rate	600 cyc/h 131 °F (55 °C)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Connections - terminals	Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible with cable end Control circuit screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)solid without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)solid without cable end Power circuit bar 2 100 x 5 mm Power circuit bolted connection
Tightening torque	Control circuit 10.62 lbf.in (1.2 N.m) Power circuit 513.34 lbf.in (58 N.m)
Mounting Support	Plate
Control circuit type	AC 40...400 Hz
Heat dissipation	44 W
Motor power range	250...500 KW 380...440 V 3 phase 110...220 KW 200...240 V 3 phase 250...500 kW 480...500 V 3 phase
Motor starter type	Direct on-line contactor
Contactor coil voltage	110 V AC standard 120 V AC standard
Standards	EN 60947-1 JIS C8201-4-1 IEC 60947-4-1 IEC 60947-1 EN 60947-4-1
Product Certifications	UL RINA ABS CB RMRoS CSA LROS (Lloyds register of shipping) DNV BV UKCA

Environment

IP degree of protection	IP20 front face with shrouds IEC 60529 IP20 front face with shrouds VDE 0106
Protective treatment	TH
Ambient Air Temperature for Operation	23...131 °F (-5...55 °C)
Ambient Air Temperature for Storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C)
Operating altitude	9842.52 ft (3000 m) without derating
Height	17.09 in (434 mm)
Width	27.64 in (702 mm)
Depth	10.04 in (255 mm)
Net Weight	87.08 lb(US) (39.5 kg)

Ordering and shipping details

Category	22336-CTR,F-LINE,AC,OPEN,NONREV
Discount Schedule	I12
GTIN	3389110227246
Nbr. of units in pkg.	1
Package weight(Lbs)	125.66 lb(US) (57.0 kg)
Returnability	No
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	15.75 in (40 cm)
Package 1 width	17.52 in (44.5 cm)
Package 1 Length	37.40 in (95 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	2
Package 2 Weight	310.85 lb(US) (141.0 kg)
Package 2 Height	76.77 in (195 cm)
Package 2 width	47.24 in (120 cm)
Package 2 Length	31.50 in (80 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions and Drawings

LC1 F780

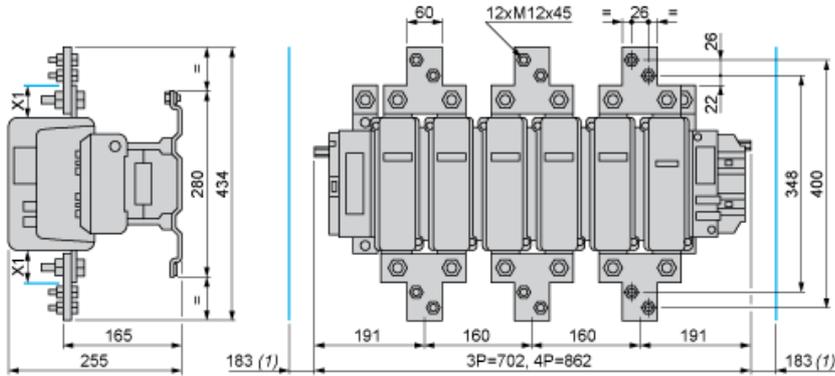


(1) Minimum distance required for coil removal.


NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

Voltage	200...500 V	690...1000 V
X1 (mm)	30	35

Fixing centers of LC1 F780

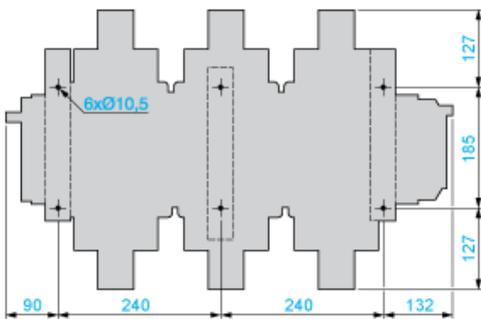

Connections and Schema



LC1 F780 ~ or ☰

