

Article No. : 6SL3230-1YH40-0UP0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		
Input		
Number of phases	3 AC	
Line voltage	500 ... 690 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated voltage	690V IEC	600V NEC
Rated current (LO)	59.00 A	59.00 A
Rated current (HO)	54.40 A	54.40 A
Output		
Number of phases	3 AC	
Rated voltage	690V IEC	600V NEC
Rated power (LO)	55.00 kW	60.00 hp
Rated power (HO)	45.00 kW	50.00 hp
Rated current (LO)	62.00 A	62.00 A
Rated current (HO)	52.00 A	52.00 A
Rated current (IN)	64.00 A	
Max. output current	84.00 A	
Pulse frequency	2 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)
110% base load current IL for 60 s in a 300 s cycle time
High Overload (HO)
150% x base load current IH for 60 s within a 600 s cycle time

General tech. specifications	
Power factor λ	0.90 ... 0.95
Offset factor cos φ	0.99
Efficiency η	0.98
Sound pressure level (1m)	70 dB
Power loss	1.310 kW
Filter class (integrated)	Unfiltered
EMC category (with accessories)	without

Ambient conditions	
Standard board coating type	Class 3C3, according to IEC 60721-3-3: 2002
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.083 m³/s (2.931 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation	-20 ... 45 °C (-4 ... 113 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)
Relative humidity	
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
Mechanical data	
Degree of protection	IP20 / UL open type
Size	FSE
Net weight	26.7 kg (58.86 lb)
Width	275 mm (10.83 in)
Height	551 mm (21.69 in)
Depth	248 mm (9.76 in)

Data sheet for SINAMICS G120X

Article No. : 6SL3230-1YH40-0UP0


Inputs / outputs	
Standard digital inputs	
Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0
Analog / digital inputs	
Number	2 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0 → 1	4 V
1 → 0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C	

Closed-loop control techniques	
V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	Yes
Torque control, with encoder	No

Communication	
Communication	PROFIBUS DP

Connections	
Signal cable	
Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)
Line side	
Version	screw-type terminal
Conductor cross-section	25.00 ... 70.00 mm ² (AWG 6 ... AWG 3/0)
Motor end	
Version	Screw-type terminals
Conductor cross-section	25.00 ... 70.00 mm ² (AWG 6 ... AWG 3/0)
DC link (for braking resistor)	
PE connection	Screw-type terminals
Max. motor cable length	
Shielded	300 m (984.25 ft)
Unshielded	450 m (1,476.38 ft)

Converter losses to EN 50598-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-38.9 %

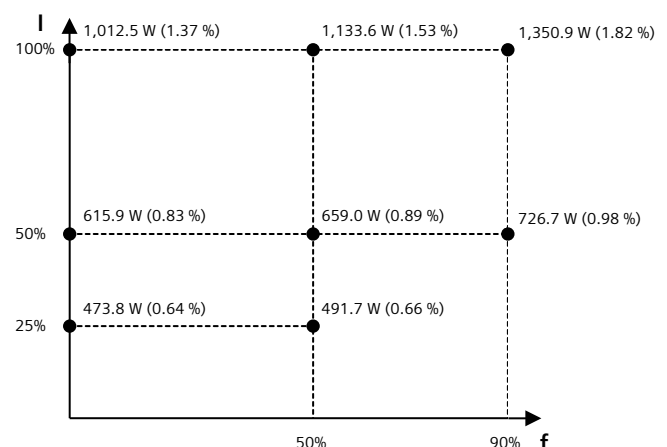

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Article No. : 6SL3230-1YH40-0UP0